

MOTIVE POWER



Gel Leisure

Deep Cycle Batteries

POWER FOR TOMORROW TODAY

Gel Leisure Bloc Battery

With an extensive product range available Eternity Technologies prides itself on world-class product design, production processes, technical development, cost structure and global location.

Eternity Technologies valve regulated lead-acid batteries for the leisure market. With an innovative Gel-technology and maintenance free design, Eternity Technology Gel Leisure batteries are compatible with all leisure applications.

Features of Gel Leisure Bloc Batteries...

Maintenance-free bloc batteries in Gel technology (no topping up during lifetime)

Good high current performance for extreme operating conditions

High-class patented safety valve

700 cycles (DIN EN 60254-1) (IEC 254-1)

Capacity: 56–210 Ah (C20)

Low self discharge rate allows for up to 2 years shelf life

Valve-regulated lead-acid battery

Recyclable

Long cycle life



Compliant with EN60254-1 & IEC254-1

Applications...



Caravans



Motorhomes



Maritime

& other leisure applications

For I&O&M please visit www.eternitytechnologies.com



Bloc Specifications...

Type	Group Type	Voltage	Capacity Ah C ₂₀	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Terminal	CCA (EN)
L06 06 205 GC2	GC2	6	206	260	180	258	33	M8 / AP / DU / ST	
L06 12 56	DIN L3	12	56	277	175	190	21	A-POLE	410
L06 12 80	DIN L5	12	81	350	175	190	28	A-POLE	540
L06 12 88	BCI31	12	94	329	170	205	32	M8 / AP / DU / ST	460
L06 12 120	BCI12 / 5SHP	12	123	329	170	258	42	M8 / AP / DU / ST	750
L06 12 125	DINA	12	127	513	189	196	45	A-POLE	760
L06 12 150	DINB	12	159	513	223	196	54	M8 / AP / DU / ST	
L06 12 150*	BCI4D	12	159	513	223	196	54	M8 / AP / DU / ST	900
L06 12 210	DINC	12	212	518	274	215	68	M8 / AP / DU / ST	
L06 12 210*	BCI8D	12	212	518	274	215	68	M8 / AP / DU / ST	1030

* Reverse polarity

± 5% weight tolerance

Charging profile

IU Charging I = min. 12% C₅ max. 18% C₅
U = 2.4 V per cell

IUI Charging I₁ = min. 12% C₅ max. 18% C₅
U = 2.35 V per cell
I₂ = 1.5 % C₅ for max. 4 hours

Torque



Torque: 6Nm





Torque: 8Nm




Torque: 10Nm



Height is an additional 20mm for A-Terminal, Dual & Stud



A global leader in the industrial battery market providing world-class products for Motive Power and Network Power applications.

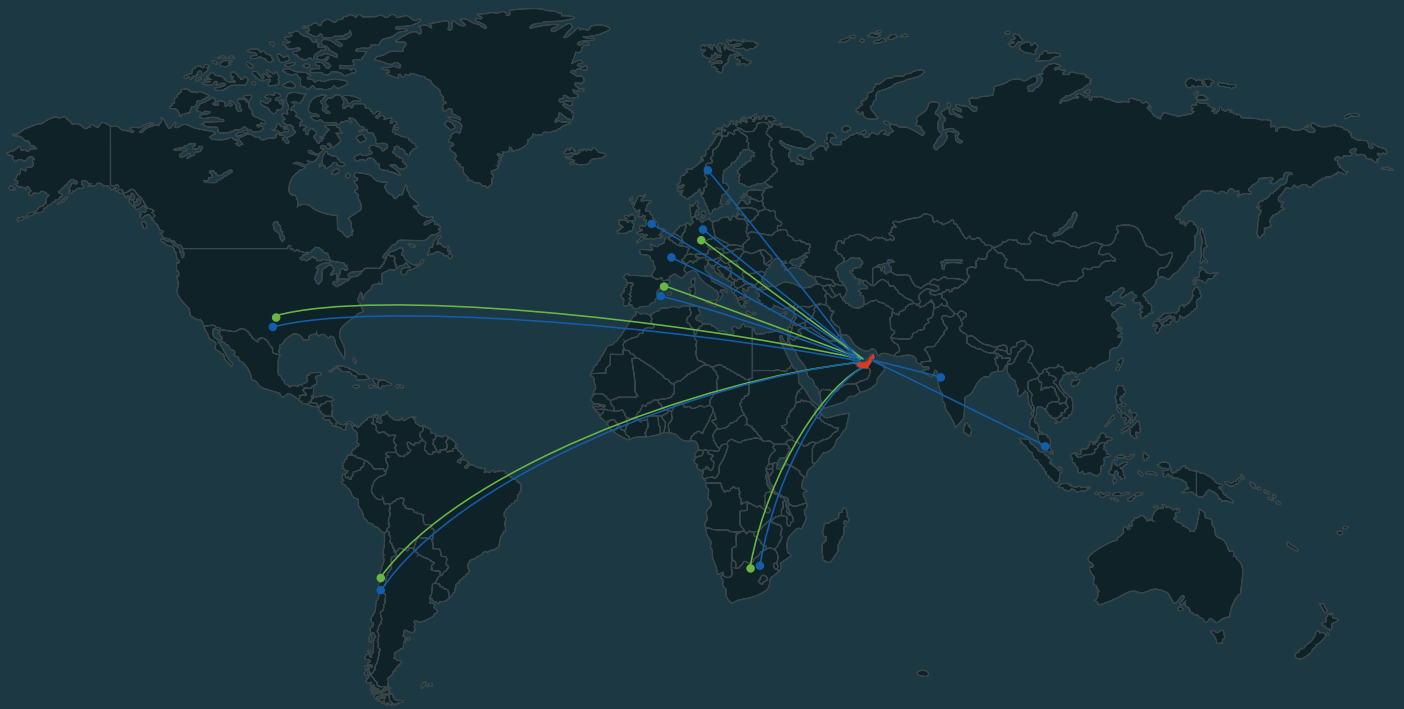

Eternity Technologies FZ-LLC

Al Jazeera / Al Hamra, PO Box 35102,
Ras Al Khaimah, UAE

Sales & service

info@eternitytechnologies.com

www.eternitytechnologies.com

